

Liebert® S600E

20 kVA 3 X 3



FEATURES


- True double-conversion
- DSP technology guarantees high performance
- Output power factor 0.9
- Active power factor correction in all phases
- 50Hz/60Hz frequency converter mode
- ECO mode operation for energy saving (ECO)
- Emergency power off function (EPO)
- Generator compatible
- SNMP+USB+RS-232 multiple communications
- 3-stage extendable charging design for optimized battery performance
- Adjustable battery numbers for long-run model
- Maintenance bypass available
- Parallel operation

True Online Double Conversion UPS with extended runtime capabilities

Liebert® S600E (3 X 3) Series systems is true double conversion online UPS systems designed to provide with a capacity of 20kVA. Liebert® S600E (3 X 3) units feature precise output voltage and clean power, making the systems ideal for Data Networks / Small Data Centers / VOIP Applications. The units support parallel configuration, making them suited for critical application.



Liebert® S600E (3 X 3)

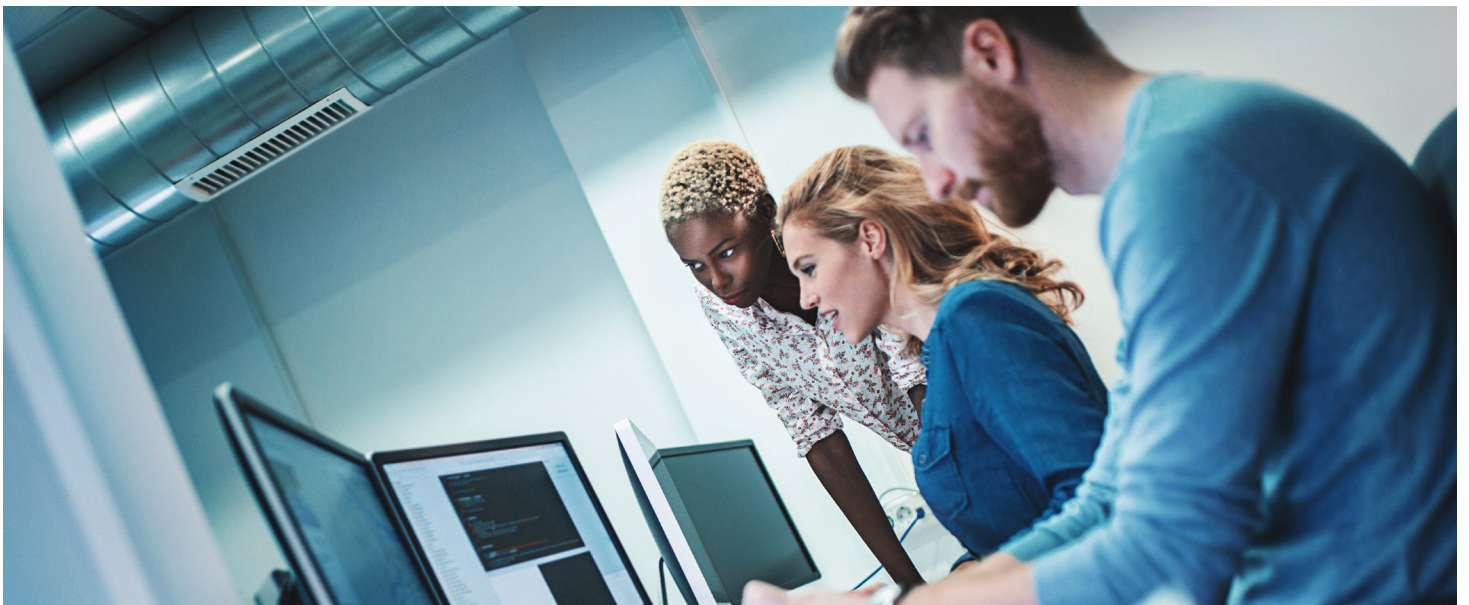

Model	S600E 20KVA (3in/3out)
System parameter	
Rating	20KVA/18kw (3in-3out)
Input	
Rated voltage	415VAC 3-phase,4-wire
Volatge Range	Three phase 310VAC -502VAC at 100% load,181VAC -502VAC at 50% load
Rated Frequency	50Hz/60Hz
Frequency Range	40Hz ~ 70Hz
Power factor	0.95 at full load
Input phase reversal correction	No
Output	
Rated power	20KVA/18kw
Voltage	Three Phase 380/400/415 Vac
Frequency synchronization range	Rated frequency±3Hz. Configurable range: ±0.5Hz ~ ±5Hz
Rated Power Factor	Unity
Crest Factor	3:1
Voltage harmonic distortion	< 2% (linear load)
Voltage Regulation	1%
Dynamic response recovery time	40ms
Inverter Overload Capability on utility mode	At 25°C: 105% ~ 125%- 5min; 125% ~ 150%-1min; 150%- more than 200ms
Inverter Overload Capability on battery mode	At 25°C :105% ~125%-60~ 30 s; >125%- more than 200ms
Bypass	
Seperate bypass	Yes
Static bypass	Inbuilt
Efficiency	
ECO Mode	>94%
Online mode (AC-AC)	> 91%
Inverter Efficiency(DC-AC)	>94%
Battery	
Type	Sealed, lead-acid,Tubular
No's of Batteries	24(1),32,40 ; 32 by default
Battery charging capacity	13A
Transfer Time	
Mains - Battery	0ms
Inverter-Bypass	Synchronous transfer: ≤0ms, Asynchronous transfer (default): ≤20ms
Noise	
Noise	<65db
Panel display mode	
Display type	Graphical LCD display
Environmental parameter	
Operating temperature	0°C ~ 50°C
Storage temperature	-40°C ~ +70°C (battery excluded); -25°C ~ +55°C (battery included)
Relative humidity	5%RH ~ 95%RH, non-condensing
Altitude	≤3000m; derating when higher than 3000m
Mechanical parameter	
W*D*H (mm)	334 * 654 * 1300
Weight (Kg)	280kg
Ventilation	Forced -air cooled
Ingress protection level	IP20
Color	Powder coated Black Texture finish
Cable entry	Rear bottom
Network Management	
Smart RS232/USB	Supports Windows 2000/2003/XP/Vista/2008,Windows 7,Linux,unix and MAC
SNMP	Inbuilt for web monitoring
Optional SNMP	Power management from SNMP manager and web browser
Management software	Site monitor
Modbus	Inbuilt via multifunction port

Note : (1) UPS power will be derate to 70% of the total capacity

Vertiv Energy Private Limited | Plot C-20, Rd No. 19, Wagle Ind Estate, Thane (W), 400604. India

© 2019 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo trademarks or registered marks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.